



## Fiber Pigtail

### ST/upc MM OM3 0.9mm

#### 1. Discription

Fiber optic pigtails provide interconnect and cross-connect of applications over installations in entrance facilities, telecommunications rooms, and data centers and at the desk. Our Fiber Patch cords support network applications in main, horizontal and equipment distribution areas and are available in riser (LSZH/PVC), and low smoke zero halogen (LSZH) rated jacket materials to comply with local cabling ordinances. Our patch cords are RoSH compliance and meet Telcordia GR326 requirements. And Our Pre-terminated fiber optic pigtails support fusion splice field termination applications. Fiber optic patch cords and pigtails are available in OS2,OM1, OM2, OM3, OM4,OM5 fiber types to meet the demands of Gigabit Ethernet, 10 Gigabit Ethernet and high speed Fiber Channel network.

#### 2.Features


- 100% factory tested,Low environmental sensitivity
- Low insertion loss,High return loss,Stricter than industry standards
- Good exchange ability and good durability,Stable optical properties
- Standard connector,Various connector option: SC、 LC、 FC、 ST、 E2000、 MU、 DIN etc.
- Compliant with IEC61754, GR-326, TIA/EIA 568 standard

#### 3.Applications

- Telecom Network
- Local Network
- Optical Fiber Sensor
- Optical Fiber Test Equipment
- Optical Fiber Communication System
- FTTH,LAN,PON & Optical CATV

#### 4. Picture

ST/upc MM OM3 0.9mm :

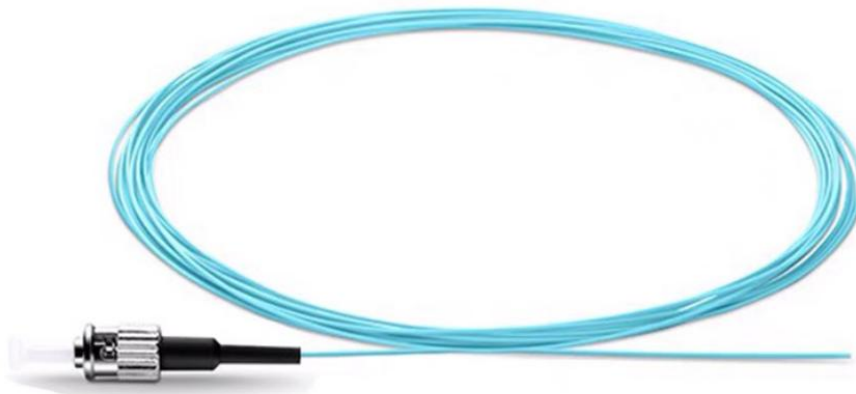


#### 5. Connector Type

Connector Type	SM Boot Color	SM Frame Color	MM Boot Color	MM Frame Color
LC	White/Green	Blue/Green	White/Aqua/Magenta/Lime green	Beige/Aqua/Magenta/Lime green
SC	Blue/Green	Blue/Green	Beige/Aqua/Magenta/Lime green	Beige/Aqua/Magenta/Lime green
ST	Black	Metal	Black	Metal
FC	Black	Metal	Black	Metal

## 6. Specification

Parameter	Unit	SC LC FC				ST		
		SM			MM	SM		MM
		PC	UPC	APC	PC	PC	UPC	PC
<b>Insertion loss</b>	dB	≤0.3	≤0.2	≤0.3	≤0.3	≤0.3	≤0.2	≤0.3
<b>Return loss</b>	dB	≥50	≥50	≥60	≥38	≥50	≥50	≥38
<b>Operating wavelength</b>	nm	1310,1550				1310,1550		
<b>Exchangeability</b>	dB	≤0.2				≤0.2		
<b>Vibration</b>	dB	≤0.2				≤0.2		
<b>Cable diameter</b>	mm	Φ0.9/φ2.0/φ3.0				Φ0.9/φ2.0/φ3.0		
<b>Cable Jacket(Optional)</b>	LSZH、OFNP、OFNR、PVC							
<b>Fiber Type(Optional)</b>	G652D, G657A, G657B, G655, OM1, OM2, OM3, OM4, OM5							
<b>3D(Optional)</b>	Radius of Curvature :10-25mm(PC/UPC), 5-12mm(APC) 3D Apex offset : 0-50um High fiber : ±100 nm Angle: 8±0.2°(APC)							
<b>Repeatability</b>	1000 times typical change value ≤ 0.20dB							
<b>Interchangeability</b>	≤0.20dB							
<b>Operating Temperature</b>	℃	-40 ~ +85						
<b>Storage Temperature</b>	℃	-40 ~ +85						
<b>Length</b>	mtrs	1.2.3.4.5... to all length /Customized length						


## 7. Multi-mode fiber end face detection schemes

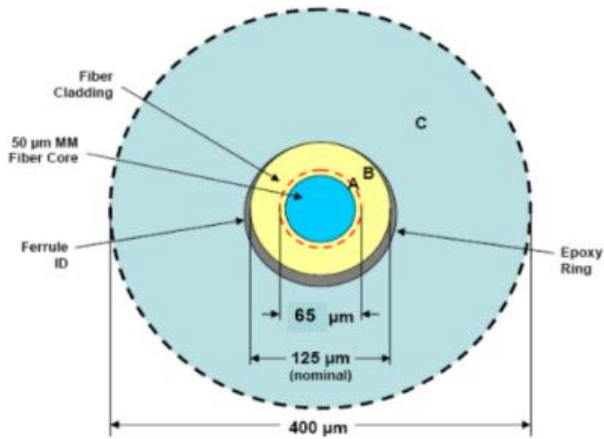


## 8. Ordering Specifications

- 1: Connector type: SC, LC, FC, ST, MTRJ, MU, E2000, MPO, DIN
- 2: Ferrule End-face: UPC, PC, APC
- 3: Core Type: Singlemode (SM: 9/125 μm), Multimode (MM: 50/125 μm or 62.5/125 μm)
- 4: Fiber Cores: Simplex, Duplex, 6cores, 12cores, 16cores, 24cores, 48cores etc.
- 5: Cable Diameter: 2.0mm/3.0mm/0.9mm
- 6: Cable Length: 1, 2, 3, 4, 5 meter or customized length
- 7: Cable Jacket: LSZH, PVC, OFNR, OFNP

## 9. Tested before delivery

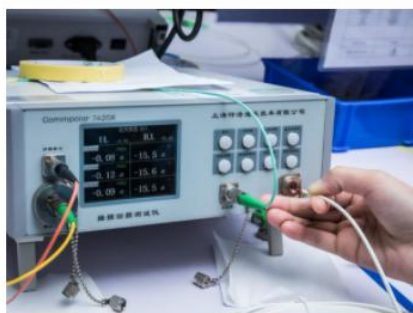

IL/RL test

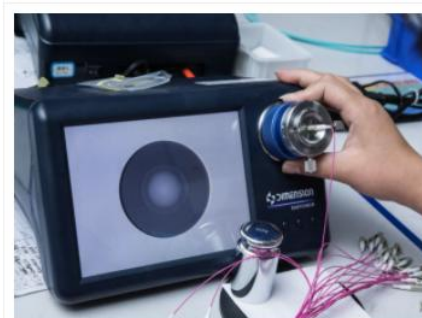

End surface test

## 10.Packing

1pcs packed in 1 PE bag,test report is sticked to the middle of the bag

20pcs packed in 1 big PE bag

800pcs packed in 1 inner carton( size 30\*39\*30)



Two inner cartons ( size 30\*39\*30) put in 1 big outer carton(size 60\*39\*60),packing list is stick to the outside of the carton

