


# 1U Rack Mounted Sliding Type Fiber Patch Panel 24 ports FC Simplex RMS-24-1U-FC

#### 1. Product Picture:





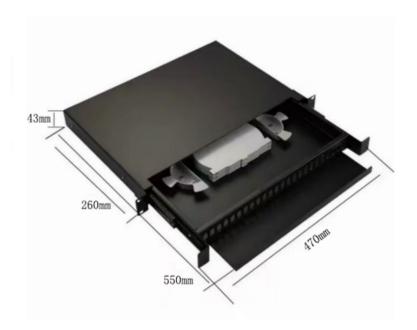

## 2.Description:

Sliding Rack-mount Fiber Optic Distribution Frame has cold steel sliding fittings rail with self-locking functions prevent the drawer from falling when moved; 19-inch rack mount for SC, LC, FC, ST adapters. The drawer is the holding board for splicing, easy to withdraw the fibers when testing and distributing. Enough room for fiber storage, Providing relevant accessories.



#### 3.Features:

High quality cold rolled sheet forming, electrostatic powder spraying technology, smooth surface, not east to rust. High strength sheet metal, long-term using is not easy to deformation. The edges of metal parts are designed with rounded corners to avoid damage to cables. The bottom plate is designed with sliding design, for the patch panel already installed on the cabinet, the wiring can be adjusted without removing the patch panel.

## 4.Application:

- ♦ Local Area Network
- ◆ CATV Network
- ♦ FTTx FTTH System
- ♦ Wide Area Network
- ♦ Test Instruments

### 5.Environment:

The operating and storage temperature: -  $45 \sim +80$  °C. Tolerable humidity: <95%. The voltage resistance between the cable grounding device in the shell and the shell is >3000V(DV), which is tested in 1 minute without breakdown and no flash over.

# 6.Specification:

Model	RMS-24-1U-FC			
Туре	19inch Rack Mount Type			
Material	1.0 ~1.2mm CRS(Cold Rolled Steel)			
Size W*D*H (mm)	483*260*1U			
Max Capacity (Ports)	24Ports 24pcs FC adapter			
Included Accessories	4pcs cable fix accessories, heat shrink tubes, cable ties, number tapes, adapter screws			
Product Color	Black			
Weight	5kg/unit			



Working Temperature	-40~+85°C
Storage Temperature	-40~+85°C
Outer Carton Dimension (mm)	485*305*425 / 5pcs
Outer Carton Weight (kg)	25 / 5pcs

# 7. Order Specification

Model	Fiber Ports	Height	Diamension(cm)	Adapter Type	
RMS-12-1U	12	1U	483*260*1U	SC Simplex	
RMS-24-1U	24	1U	483*260*1U	SC Simplex	
RMD-12-1U	12	1U	483*260*1U	SC Duplex	
RMD-24-1U	24	1U	483*260*1U	SC Duplex	
RMS-24-1U-FC	24	1U	483*260*1U	FC Simplex	
RMS-48-2U	48	2U	483*260*2U	SC Simplex	
RMD-48-2U	48	2U	483*260*2U	SC Duplex	
Note :Can aslo do 3U,4U fiber patch panel ,accept customization.					